

Deform-Nut®

SERIE AFH • APH

S E R I E S

THREADED TUBULAR RIVET NUTS - LIGHT ALLOY

APPLICATION

On boxed and tubular sections, metal sheets, other materials.

ASSEMBLY

By specific manual and pneumatic tools.



SERIES APH (round head)

CODE	Grip range	Total length	Metrical thread	Shaft Ø	Hex key	Head thicknesses	Hole Ø	Rear length
	(s)	(l)	(d1) 6H	(d)	(d3)	(l1)	(d5) +0,15 0	(l2) *
APH 425	0,5 ÷ 2,5	11	M 4	6	9	1	6	5,7
APH 440	2,5 ÷ 4,0	13						
APH 530	0,5 ÷ 3,0	13						
APH 550	3,0 ÷ 5,0	15,5	M 5	7	10	1,2	7	7,5
APH 620	0,5 ÷ 2,3	14,5						
APH 640	2,3 ÷ 4,0	16						
APH 660	4,0 ÷ 6,0	17,5	M 6	9	12	1,5	9	8
APH 830	0,5 ÷ 3,5	17,5						
APH 860	3,5 ÷ 6,0	20						
			M 8	11	15	1,5	11	9,7

SERIES AFH (countersunk head)

CODE	Grip range	Total length	Metrical thread	Shaft Ø	Hex key	Head thicknesses	Hole Ø	Rear length
	(s)	(l)	(d1) 6H	(d)	(d3)	(l1)	(d5) +0,15 0	(l2) *
AFH 435	1,6 ÷ 3,5	11	M 4	6	9	1,5	6	6
AFH 450	3,5 ÷ 5,0	13						
AFH 540	1,6 ÷ 4,0	13						
AFH 560	4,0 ÷ 6,0	15	M 5	7	10	1,5	7	7
AFH 640	1,6 ÷ 4,0	15						
AFH 660	4,0 ÷ 6,0	17						
AFH 840	1,6 ÷ 4,0	16,5	M 6	9	12	1,5	9	8,8
AFH 860	4,0 ÷ 6,0	19						
			M 8	11	14	1,5	11	10

* Dimensions measured on average thicknesses. Variable according to s dimension.

SERIES APH (with round head)

MATERIAL

Light alloy

SURFACE TREATMENT

Natural state

THREAD TOLERANCE

Metrical tolerance ISO 6H

EXAMPLE OF CODE DESIGNATION

Threaded tubular rivet nut with round head, grip thicknesses 2,0mm, M 5 thread, light alloy:
APH 530

SERIES AFH (with countersunk head)

MATERIAL

Light alloy

SURFACE TREATMENT

Natural state

THREAD TOLERANCE


Metrical tolerance ISO 6H

EXAMPLE OF CODE DESIGNATION

Threaded tubular rivet nut with countersunk head, grip thicknesses 2,0mm, M 5 thread,
light alloy: AFH 540
Non binding dimensions, expressed in mm.

Juno Industries BVBA - Stoktevijver 22 - 9930 Zomergem/België/Belgique
Tel/tél: (0)9/395.95.90 - Fax: (0)9/395.95.91 - co@junoindustries.eu

APH

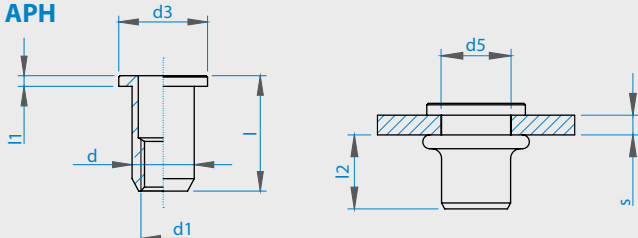

AFH

